



LED OSVĚTLENÍ
PRO HLINÍKOVÉ PROFILY

NOVINKA

PATENT





	Napětí	Jmenovitý příkon	Barva světla	Délka L	Hmotnost
Obj. č.	V DC	W	K	mm	g
700.012.4000.0250	24	3,75	□ 4000	250	65
700.012.4000.0500	24	7,5	□ 4000	500	120
700.012.4000.1000	24	15	□ 4000	1000	230
700.012.4000.1990	24	30	□ 4000	1990	450
700.012.4000.2990	24	45	□ 4000	2990	680
700.012.4000.0250G	24	3,75	■	250	65
700.012.4000.0250R	24	3,75	■	250	65
700.012.4000.0250B	24	3,75	■	250	65
700.012.4000.0500G	24	7,5	■	500	120
700.012.4000.0500R	24	7,5	■	500	120
700.012.4000.0500B	24	7,5	■	500	120

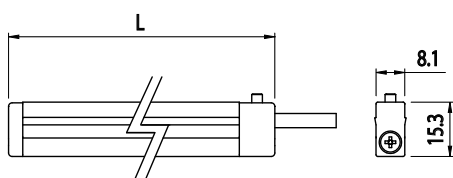

MONTÁŽNÍ INSTRUKCE:

Vložte osvětlení do drážky

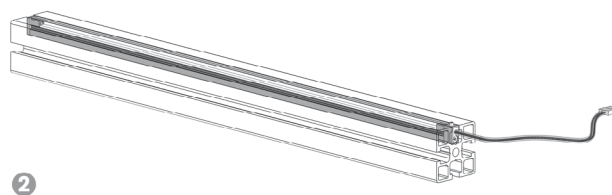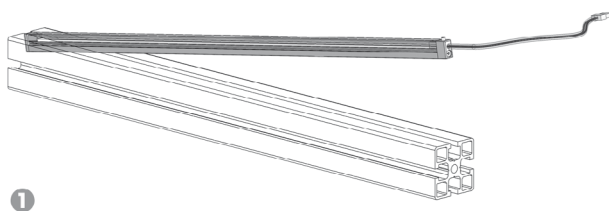

Připojte ke zdroji elektrického napájení

