


LED OSVĚTLENÍ
PRO HLINÍKOVÉ PROFILY



NOVINKA

PATENT

BH 8 30 IM 8 40


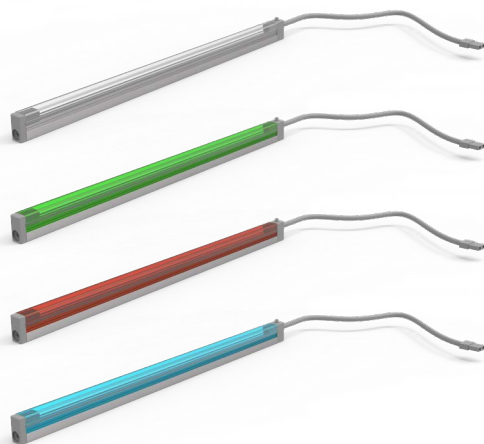


Obj. č.	Napětí	Jmenovitý příkon	Barva světla	Délka L	Hmotnost
700.015.4000.0250	24	3,75	□ 4000	250	65
700.015.4000.0500	24	7,5	□ 4000	500	120
700.015.4000.1000	24	15	□ 4000	1 000	230
700.015.4000.1990	24	30	□ 4000	1 990	450
700.015.4000.2990	24	45	□ 4000	2 990	680
700.015.4000.0250G	24	3,75	■	250	65
700.015.4000.0250R	24	3,75	■	250	65
700.015.4000.0250B	24	3,75	■	250	65
700.015.4000.0500G	24	7,5	■	500	120
700.015.4000.0500R	24	7,5	■	500	120
700.015.4000.0500B	24	7,5	■	500	120

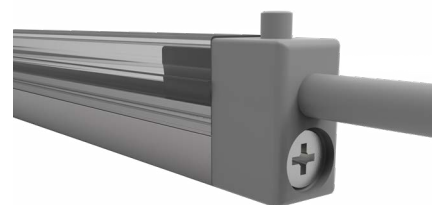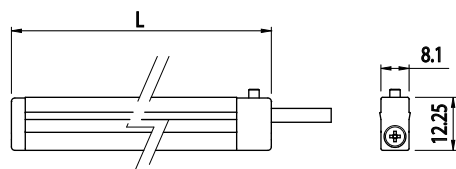

MONTÁŽNÍ INSTRUKCE:

Vložte osvětlení do drážky

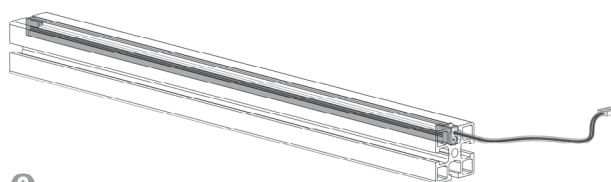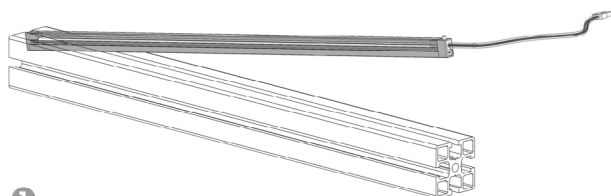

Připojte ke zdroji elektrického napájení

